

TSS-315



Basic characteristics:

- Compatible with Tubular HPS or HID lamps 250W and 400W
- Lamp base E40
- Bright anodized aluminum reflector sealed to the body with silicone seal
- Tempered glass, resistant to thermal shock
- Base for photocell sensor
- High pressure Die Cast aluminum housing
- Electrostatic paint in gray color
- Adaptable installation on posts through 60mm in diameter (maximum)




TIS.1955-2551

TECHNICAL CHARACTERISTICS

Applications	Public lighting, Streets, Avenues, Roadway ,Highways,Expressways
Base	E40
Lamps	HPS / HID
Power	250 / 400W
Optical efficiency	80%
Class Insulation	I
Photocell Base	Yes
Housing material	Die Cast Aluminum
Material of diffuser	Glass
Finish	Gray
protection rating	IP 65
Impact protection index	IK 05
Product Dimensions (WxDxH)	635x290x190mm
Weight	7.00 kg
Arm	48 - 60mm

Photometric Curve

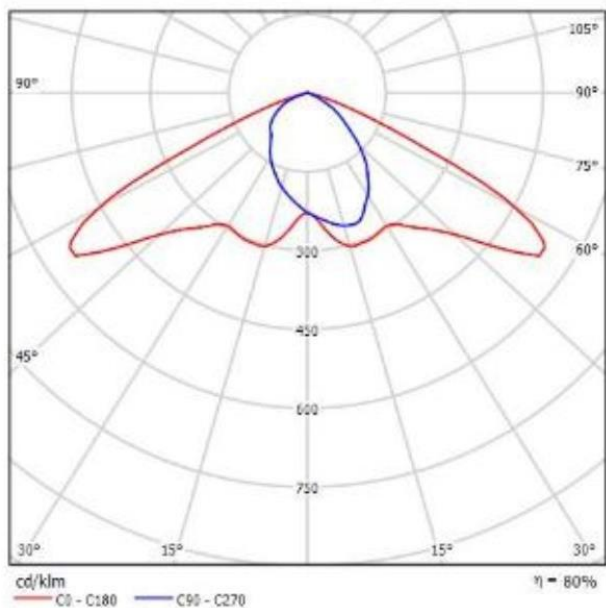

Product Dimension

