

TSS-325



Basic characteristics:


- Compatible with Tubular HST or HSE lamps 250W and 400W
- Lamp base E40
- Bright anodized aluminum reflector sealed to the body with silicone seal
- Tempered glass, resistant to thermal shock
- Base for photocell sensor
- High pressure Die Cast aluminum housing
- Electrostatic paint in gray color
- Adaptable installation on posts through 60mm in diameter (maximum)



TECHNICAL CHARACTERISTICS

| | |
|-----------------------------------|--|
| Applications | Public lighting, Streets, Avenues, Roadway ,Highways,Expressways |
| Base | E40 |
| Lamps | HPS / HST |
| Power | 250 / 400W |
| Optical efficiency | 80% |
| Light Distributions | Semi Cut off |
| Photocell Base | Yes |
| Housing material | Die Cast Aluminum |
| Material of diffuser | Glass |
| Finish | Gray |
| protection rating | IP 65 |
| Impact protection index | IK 05 |
| Product Dimensions (WxDxH) | 635x290x190mm |
| Weight | 4.4kg |
| Arm | 48 - 60mm |

Photometric Curve

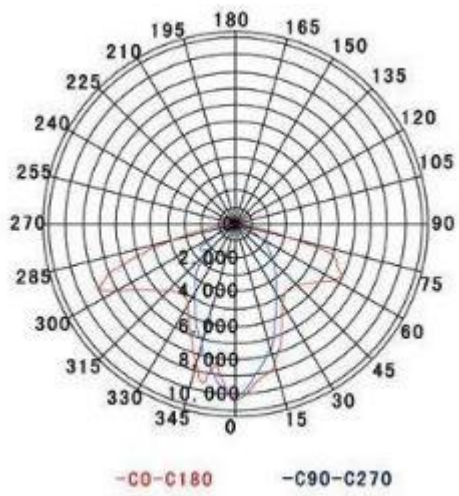

Product Dimension

